



Lucy

Pure soft water

Lucy

Lucy is a compact softener with a unique design inspired by nature. Combining high performing technology & a user-friendly experience, the Lucy meets all of your needs. Enjoy the pureness of softened water with Lucy.

FEATURES SOFTENER

UNIQUE DESIGN

-  **SPACE-SAVING**
Square and compact cabinet
-  **ROBUST**
avoids distortion
when filled with salt & water
-  **PRACTICAL**
movable cover
for easy salt filling



USER-FRIENDLY

-  **ERGONOMIC HANDLES**
to easily move the machine
-  **TOUCH KEY** (SE timer)
-  **LARGE LCD** color screen (SE timer)
-  **MULTIPLE LANGUAGES**
ENG - FR - DU - ES - IT - DE - PL



Join our mission.
Make water count.

HIGH-PERFORMING



SAVES WATER & SALT

- Efficient valve with up flow regeneration
- Proportional brining



OVERFLOW PROTECTION



AVOIDS BACTERIA GROWTH

- Dry brine tank (SE timer)
- Residual chlorine generator (option)
- Automatic cycle during holiday



SALT ALARM (SE timer)

TIMERS

SE TIMER

Touch screen display and salt alarm



HE TIMER

Small display, without salt alarm



PERSONALIZATION

OPTION FOR YOUR LOGO




OPTION FOR DIFFERENT COLOR



Other colors available upon request
(MOQ 300pcs)

FEATURES CONTROLLER

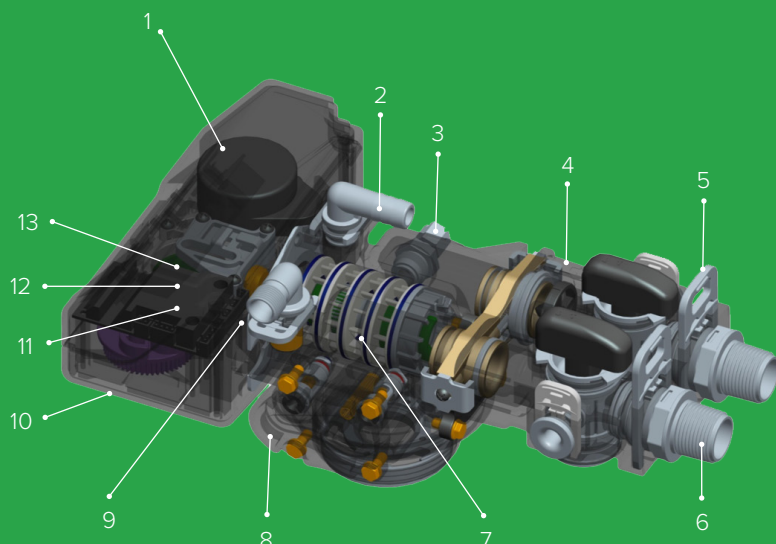

1. 12V Low Power Consumption Motor
2. Quick Connect Drain Line
3. Optional Mixing Valve
4. Unique bypass with integrated space saving turbine meter
5. Time saving quick connections
6. 1/2", 3/4", 1" BSP, NPT Connectors
7. Exclusive NSF Certified control valve with reliable piston, seal and spacer design
8. Precision Brining Injector System
9. Quick Connect Brine Line
10. Compact Low Profile Drive Structure
11. 48 hour self charging capacitor back-up
12. Audible Cycle Advance Alarm
13. Electronic Piston Sensors

TECHNICAL SPECIFICATIONS SOFTENER

MODEL	MINI	MAXI	SUPER MAXI
Dimensions mm (H x W x D)	581 x 333 x 467	1091 x 333 x 467	1220 x 330 x 467
Loading capacity	45 °f x m ³	90 °f x m ³	98 °f x m ³
Control System	BNT-850SE BNT-850HE	BNT-850SE BNT-850HE	BNT-850SE BNT-850HE
Regeneration Type	Upflow	Upflow	Upflow
Regeneration Mode	Volumetric	Volumetric	Volumetric
Tank Size	10 x 15	10 x 35	10 x 40
Resin Quantity	14 L	25 L	32 L
Service Flow Rate	0.6 m ³ /h	1.5 m ³ /h	1.9 m ³ /h
Water Used Per Regeneration (@ 100 g/L salt dosage)	58 L	112 L	175 L
Plumbing Connections	3/4" or 1"	3/4" or 1"	3/4" or 1"
Electrical Rating	220 V AC 50Hz	220 V AC 50Hz	220 V AC 50Hz
Water Supply	Municipal	Municipal	Municipal
Water Temperature	4 ~ 43°C	4 ~ 43°C	4 ~ 43°C
Operating Pressure	2 ~ 6 bar	2 ~ 6 bar	2 ~ 6 bar